

Specifications

| Models | GR-26J | |
|------------------------------------|-------------|--------|
| Measurements | US | Metric |
| Working height* | 31 ft 10 in | 9.70 m |
| Platform height | 25 ft 10 in | 7.90 m |
| Horizontal reach maximum** | 8 ft 3 in | 2.51 m |
| Up-and-over clearance maximum | 21 ft 10 in | 6.70 m |
| A Platform length | 2 ft 5 in | 0.75 m |
| B Platform width | 2 ft 11 in | 0.90 m |
| Toeboard height | 6 in | 0.15 m |
| C Height - stowed | 6 ft 6 in | 1.99 m |
| D Length - stowed | 9 ft 1 in | 2.76 m |
| E Width | 3 ft 8.8 in | 1.14 m |
| F Wheelbase | 3 ft 11 in | 1.20 m |
| G Ground clearance - center | 3.4 in | 8.5 cm |

Productivity

| | | |
|-------------------------------|---------------------|---------------|
| Maximum platform occupancy*** | 2 | |
| Lift capacity | 500 lbs | 227 kg |
| Vertical jib rotation | 140° (+70°/-70°) | |
| Turntable rotation | 350° non-continuous | |
| Turntable tailswing | 1 in | 25 mm |
| Drive speed - stowed | 2.8 mph | 4.5 km/h |
| Drive speed - raised | 0.4 mph | 0.65 km/h |
| Gradeability**** | 25% | |
| Turning radius - inside | 31 in | 0.78 m |
| Turning radius - outside | 92 in | 2.30 m |
| Controls | 24V DC proportional | |
| Drive | dual rear wheel | |
| Disc brakes | dual rear wheel | |
| Tires (solid non-marking) | 16-5-11 ¼ | 40.5 cm diam. |



Power

| | | |
|---------------------------|---|------|
| Power source | 24 V DC (twelve 2 V batteries, 280 Ah capacity) | |
| Hydraulic system capacity | 4.84 gal | 22 L |

| | | |
|-------------|-----------|----------|
| Weight***** | 6,250 lbs | 2,835 kg |
|-------------|-----------|----------|

| | | |
|----------------------|------------------------|--|
| Standards Compliance | ANSI A92.5, CSA B354.4 | |
|----------------------|------------------------|--|

Range Of Motion GR-26J

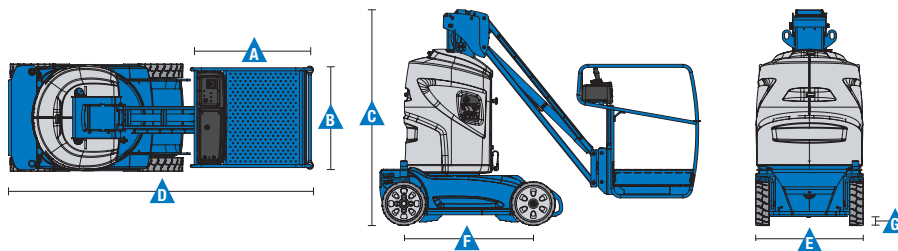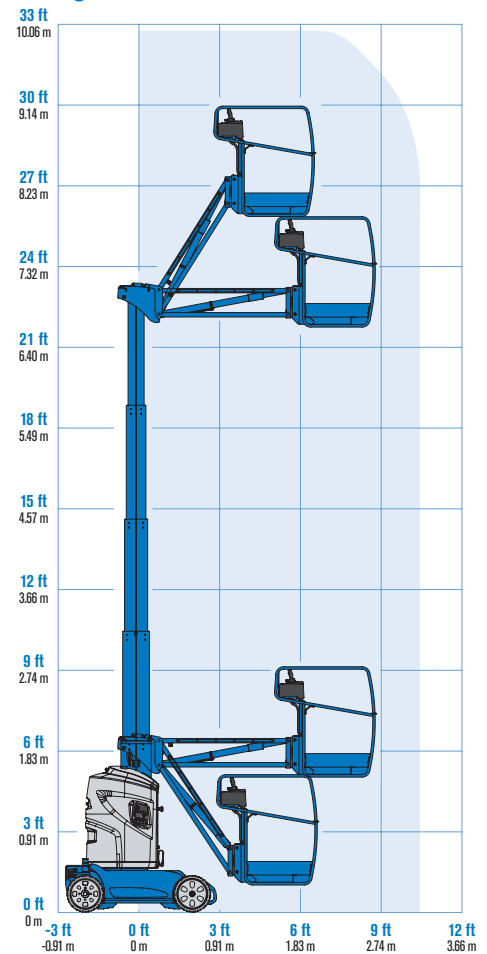

* The US equivalent of working height adds 6 ft to platform height.

** Non-working reach

*** ANSI/CSA maximum occupancy is 2 indoor and outdoor.

**** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

***** Weight will vary depending on options and/or country standards.

Features

Standard Features

Measurements

GR-26J

- 31 ft 10 in (9.70 m) working height
- 8 ft 3 in (2.51 m) horizontal reach
- 21 ft 10.5 in up-and-over reach
- Up to 500 lbs (227 kg) lift capacity
- 4 ft 10 in (1.45 m) jib boom with 140° working range

Productivity

- Standard steel platform 2 ft 11 in x 2 ft 5.5 in (0.90 m x 0.75 m) with sliding midrail
- Hydraulic turntable rotation
- Fully proportional lift and drive system
- Drivable at full height
- Low 6 in (15 cm) platform entry height
- Maintenance free rigid steel hydraulic mast
- 44.8 in (1.14 m) compact width
- Low unit height of 6 ft 6 in (1.99 m)
- Low machine weight of 6,250 lbs (2,835 kg)
- Onboard diagnostic system
- AC power to platform
- Direct electric rear wheel drive with electric parking brake
- Front wheel steering
- Brake release switch
- Reinforced ABS chassis covers
- Tie down attachments points
- Overhead crane attachment points
- Non-marking solid tires
- Drive enable system
- Horn
- Hour meter
- Tilt level sensor with audible alarm
- Platform overload sensing
- Manual platform lowering valve
- Emergency stop at both platform and ground controls

Power

- Automatic 30 Amp 24 V battery onboard charger
- 24 V DC (twelve 2V, 280 Ah traction batteries)
- Battery charge indicator

Options & Accessories

Productivity

- Flashing beacon



Genie United States

6464 185th Ave. NE
Redmond, WA 98052
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By: